

**NEWTOP**  
ONE STOP-POWERED OUTDOORS

# GARDEN MACHINERY CATALOGUE

**NEWTOP**  
ONE STOP-POWERED OUTDOORS



SHANGHAI NEWTOP MACHINERY CO.,LTD.

Add: 9/F B3, No.1599 Xinjinqiao Road, IBC(International Business Center) ,Pudong Shanghai,China  
Tel/WhatsApp: +86-13636521556    Website: [www.newtoptools.com](http://www.newtoptools.com)  
E-mail: [service@newtop.com.cn](mailto:service@newtop.com.cn)



# Provide Professional and Integrated Solution to Garden Machinery



At NEWTOP, we spent twenty years in constantly looking for ways to deliver reliable and powerful gasoline machines. Our only aim is to make gardening work easier and more enjoyable.

With years' development, our company has reached an annual capacity of 500,000 units of machines . Up to now, we have established the CNC AL-MG processing center, the injection Mould Center and the Testing Center which include emission testing equipments, gas composition analyzer, magneto testing desk, metal composition analyzer, hardness tester etc.

The adoption of these advanced facilities from America, Germany and Japan enables us to supply top quality machines to customers all over the world with high efficiency. Our complete testing equipments, strict QA procedures and professional engineers ensure the reliability and safety of our machines. Our equipments and technology control standards have reached the internationally advanced level. Our products have passed CE, GS, EURO V, EPA certification, and our company is also certified with ISO9001-2000 standards.

All the staff in the company are doing their job with our faith "Customers and End Users are the Center", including our experienced service team. With twenty years experience in exporting, they are responsive to our customers' request and efficient in solving possible problems during the whole process of delivery. Our excellent pre-and after-sales service ensures the fast and safe delivery of your goods.

We are pleased to show you our latest generation of products with this catalogue. The thing that every product has in common is to make your work easier, just be happy with us and enjoy browsing through our new catalogue.

## Values

Achieve a win-win cooperation through integrity and honesty; Gather people with dreams to seek for excellence.

## Mission

Make garden life more enjoyable by providing more applicable and eco-friendly machines.

## Vision

Create unique values for our customers; Make Newtop a prestigious and first-class enterprise.

## Working Style

We work seriously, meticulously and efficiently. We focus on quality and are loyal to our duties.

## Easiness, convenience and efficiency

are our constant pursuit in quality. Consideration, professionalism and your satisfaction are our persistent principles in offering service.

## Enterprise Certification



## Our Team



You might just see our good quality products. You might just enjoy our high level service. However, you might not yet have discovered our determination. You might not yet have known that we put our

heart and soul on every products. We chase the excellence of every detail of our products to meet your gardening design demands. We make an effort in every link of our

services to make you feel our friendly concern. Because, we know what you really need.

1998

- Exported to African markets such as Nigeria, Cameroon.

2003

- Further expanded African markets in Ghana, South Africa and developed the Indonesian market.

2005

- Successfully developed Belarus, Russian markets in Eastern Europe and Thailand, Cambodia, Vietnam markets in Southeast Asia.

2007

- Started supplying to India, Brazil, Paraguay markets.

2009

- Entered Colombia, Peru, Chile markets and successfully developed Dubai, South Korea, Poland, United Kingdom, Ukraine, Bulgaria and Greek markets.

2011

- Started supplying to Austria, and other markets.

2016

- Expanded markets to Central American countries like Guadalupe, Costa Rica, Honduras.

2017

- Entered Venezuela market and started supplying to Papua New Guinea, Fiji etc.

2018

- Started developing East African markets and entered markets of Kenya, Uganda, Tanzania etc.

2019

- Opened up markets in Ecuador, Bolivia, Philippines, Pakistan etc.


2021

- Committing to further improving product quality, expanding brand awareness, and building NEWTOP into an international enterprise.

2022

- In 2022, we expanded the Eastern European market and successfully signed agreements with agents in Poland, Romania and other countries to sell chain saws and brush cutters with Euro V emissions.

## MILESTONES

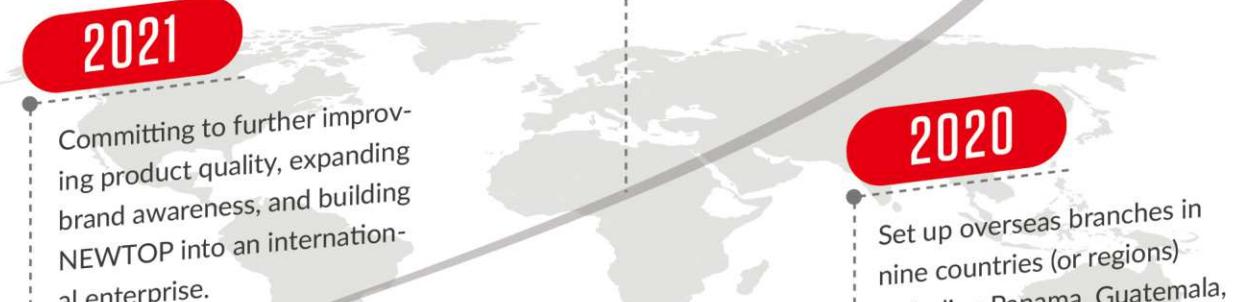

**EXHIBITION**



## Customer Remarks:

Cooperating with NEWTOP is a pleasant experience. They have strict quality control, and advanced assembly lines, strict inspection before delivery and professional after-sales service team. I have visited their head quarter in Shanghai, and was

impressed by their enthusiasm, sincerity and spirit of striving for perfection. The efficient management and strict process in their factory convinced me that products of NEWTOP are reliable. With strict quality control each part is flawless and assembled quickly and accurately,

each machine is perfectly treated. I have cooperated with NEWTOP for years, their assured quality, in time delivery and great aftersales service make me feel relaxed and comfortable. Shanghai NEWTOP is trustworthy.

# CONTENTS



<b>Chain Saws</b>	01
<b>Brush Cutters</b>	31
<b>Pole Saws</b>	47
<b>Multi-Function Tools</b>	49
<b>Sprayers</b>	51
<b>Earth Augers</b>	61
<b>Tea Picking Machines</b>	64
<b>Hedge Trimmers</b>	65
<b>Leaf Blowers</b>	67
<b>Water Pumps</b>	72
<b>Generators</b>	75
<b>Power Engines</b>	79
<b>Spare Parts</b>	83

**PROFESSIONAL CHAINSAW**
**NO.1**

**NT10500**

 Low noise  
 Low emissions  
 High power

**105.7CC** Displacement


**4.5KW** Rated Power

**10.5KG** Dry Weight

**NT10500**

ANTI Vibration, HIGH TORQUE, DIGITAL Governor, E-Start

Power Type	2 Stroke, Air Cooling
Cylinder Diameter x Stroke	58x40mm
Displacement	105.7cc
Power & Relevant Speed	4.5kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	1200ml
Engine Oil Tank Capacity	530ml
Guide Bar Size	25"-42"
Chain Pitch	.404"
Chain Gauge	.063"
G.W./N.W.	12.5kg/10.5kg

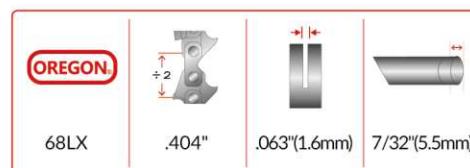
**TOP SPARK PLUG**

Continuous ignite, high power

**NEW RUBBER HANDLE**

Handle made of new rubber material, good in shock absorption and comfortable for use during work.

**LARGE HANDLE STARTER**

Easier to start

**MAGNESIUM CRANKCASE**

Magnesium Crankcase with smaller weight, better shock absorption and cooling performance.

## PROFESSIONAL CHAINSAW

## NT10500-AV

Low noise  
Low emissions  
High power

105.7CC Displacement

4.5KW Rated Power

10.5KG Dry Weight

NEW  
PRODUCT

+ 60%

DAMPING STABILITY IMPROVES BY 60% \*

\*compared with NEWTOP other similar products

## NEW ANTI VIBRATION SYSTEM

Patented design. Minimizes the violent vibration of the machine. Helps solve the problem of hands numbness, and improves the efficiency of the machine.



+ 15%

CUTTING EFFICIENCY INCREASED BY 15%\*

\*compared with a similar product in the market

+ 35%

REDUCING MACHINE VIBRATION BY 35% \*


\*compared with NEWTOP other similar products



## NT10500-AV

Power Type  
Cylinder Diameter x Stroke  
Displacement  
Power & Relevant Speed  
Fuel Mixture Ratio  
Fuel Tank Capacity  
Engine Oil Tank Capacity  
Guide Bar Size  
Chain Pitch  
Chain Gauge  
G.W./N.W.

2 Stroke, Air Cooling  
58x40mm  
105.7cc  
4.5kW/7500rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
1200ml  
530ml  
25"-42"  
.404"  
.063"  
12.5kg/10.5kg

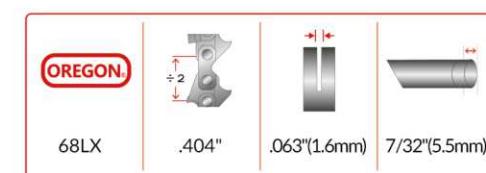

**PROFESSIONAL CHAINSAW** **NO.1**
**NT9210**

As professional loggers, you should have right assessment on the conditions when cutting the tree: the strongest part of the tree crown, any rot occurs on the trunk and the direction of the wind. Everything will be well solved with right equipment.

**91.6CC** Displacement

**5.2KW** Rated Power

**7.3KG** Dry Weight

**NEW**
**WALBRO CARBURETOR & IGNITION**


**IMPORTED PAPER AIR FILTER**

Imported paper in a corrugated manner, Service life increased by 30%.


**NT9210**


Power Type  
Cylinder Diameter x Stroke  
Displacement  
Power & Relevant Speed  
Fuel Mixture Ratio  
Fuel Tank Capacity  
Engine Oil Tank Capacity  
Guide Bar Size  
Chain Pitch  
Chain Gauge  
G.W./N.W.

2 Stroke, Air Cooling  
54x40mm  
91.6cc  
5.2kW/9500rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
825ml  
360ml  
20"-42"  
3/8"/.404"  
.063"  
9kg/7.3kg

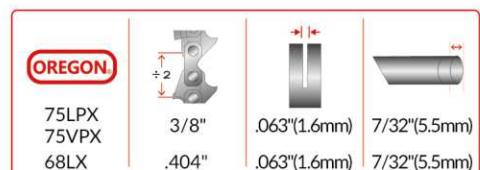
**High-QUALITY CYLINDER**

High-strength Cast Alloy-Improves the stability by 20%; Inner Plating of Ceramics--Reaches 500H lifespan.

**+ 35%**

CUTTING EFFICIENCY INCREASED BY 35%  
\*compared with a similar product in the market

**+ 25%**

REDUCING WEIGHT BY 25%  
\*compared with NEWTOP same displacement products

**MAGNESIUM CRANKCASE & SIDE COVER**

1/3 lighter than aluminum, but more stronger & better shock absorption.


**PROFESSIONAL CHAINSAW NO.1**

**NT9200**

As professional loggers, you should have right assessment on the conditions when cutting the tree: the strongest part of the tree crown, any rot occurs on the trunk and the direction of the wind. Everything will be well solved with right equipment.


**91.6CC** Displacement

**5.2KW** Rated Power

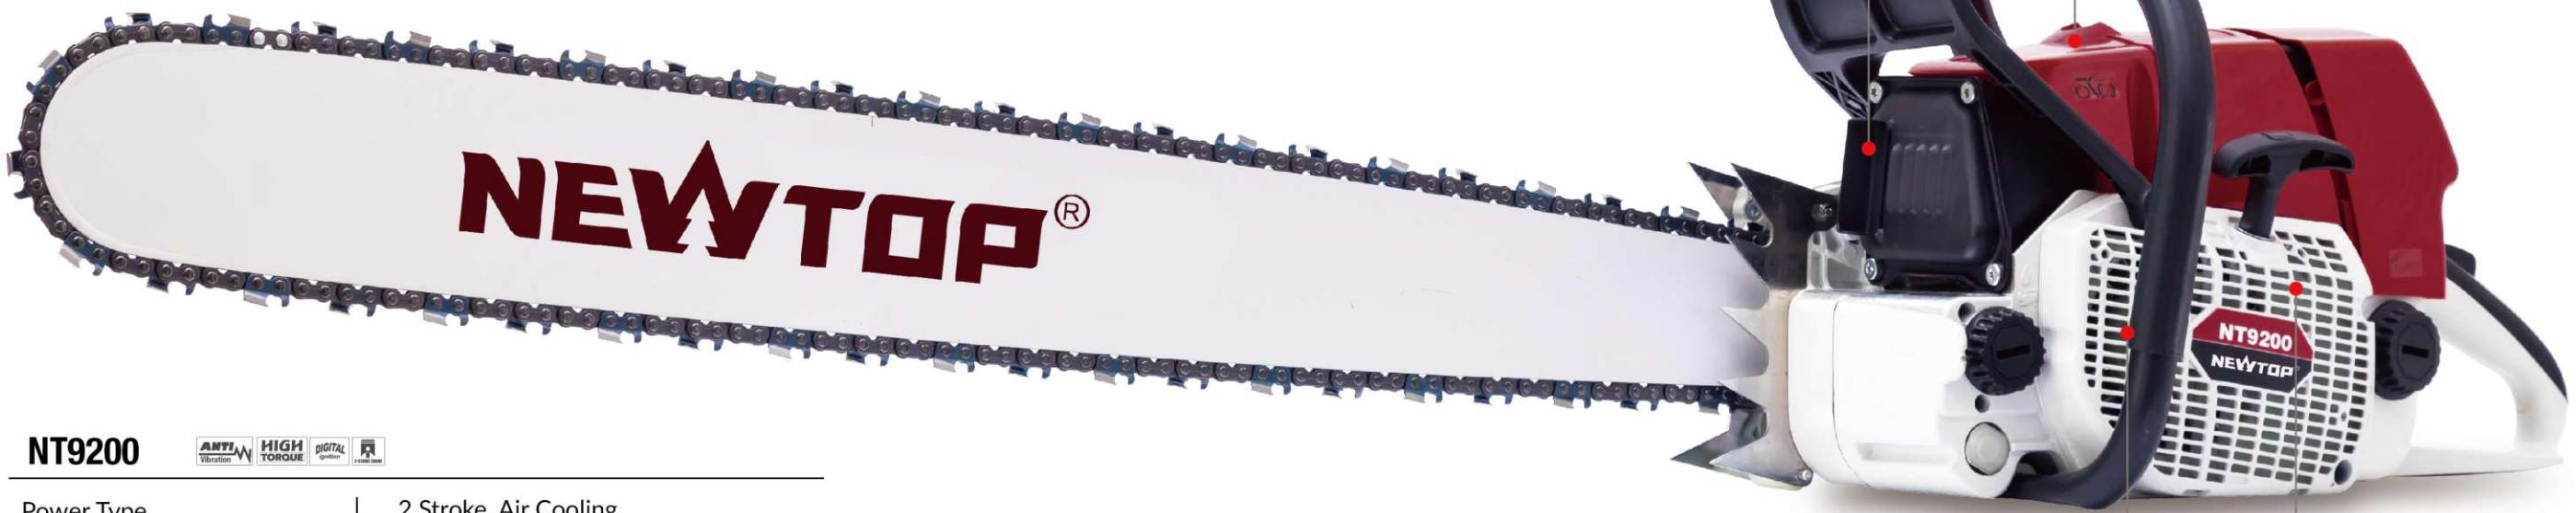**7.3KG** Dry Weight

**NT9200**


Power Type  
Cylinder Diameter x Stroke  
Displacement  
Power & Relevant Speed  
Fuel Mixture Ratio  
Fuel Tank Capacity  
Engine Oil Tank Capacity  
Guide Bar Size  
Chain Pitch  
Chain Gauge  
G.W./N.W.

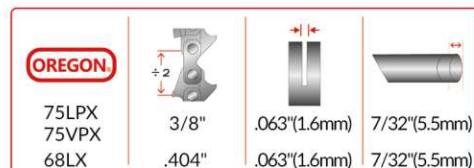2 Stroke, Air Cooling  
54x40mm  
91.6cc  
5.2kW/9500rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
825ml  
360ml  
20"-42"  
3/8"/.404"  
.063"  
9kg/7.3kg


**LOW NOISE**

The latest technology helps reduce noise.

**COMPRESSION RELEASE VALVE**

New design button of compression release valve reduces the starting resistance, making it easier to start.


**WALBRO CARBURETOR**

Use imported Walbro carburetor to improve engine lifetime and work efficiency.

**BRAND NEW RUBBER HANDLE**

New rubber reduces vibration, to avoid hand numbness problem even long-time working.

**+ 35%**

CUTTING EFFICIENCY INCREASED BY 35%  
\*compared with a similar product in the market.

**+ 25%**

REDUCING WEIGHT BY 25%  
\*compared with NEWTOP same displacement products

## PROFESSIONAL CHAINSAW

### NT7200

Heavy duty chainsaw with fuel-efficient engine. Satisfying scavenging structure, emissions conform to EU V standard. Ergonomically improved handles reduce fatigue. Ideal for working with medium to large strength wood.

**72.5CC** Displacement

**3.6KW** Rated Power

**6.5KG** Dry Weight



#### HIGH QUALITY CRANKSHAFT

20CrMo material, TAIWAN bearing inside, forged three-piece crankshaft for maximum durability for the toughest applications.



#### WALBRO CARBURETOR

Imported WALBRO carburetor, stable and continuous output of power.



#### WALBRO IGNITION COIL

Imported Walbro ignition coil, long lifespan, without risk of flameout.



GASOLINE CHAINSAW




**NT6200**

**NT6800**

**NT7200**

	NT6200	NT6800	NT7200
Power Type		2.5Stroke,Air Cooling	
Cylinder Diameter × Stroke	48×34mm	50×34mm	52×34mm
Displacement	61.5cc	68cc	72.5cc
Power & Relevant Speed	2.9kW/8000rpm	3.2kW/8200rpm	3.6kW/8500rpm
Fuel Mixture Ratio		25: 1 (Gasoline25:Two-cycle Oil 1)	
Fuel Tank Capacity	750ml	750ml	750ml
Engine Oil Tank Capacity	450ml	450ml	450ml
Guide Bar Size	16"-24"	16"-26"	16"-28"
Chain Pitch	.325"/3/8"	3/8"	3/8"
Chain Gauge	.058"/.063"	.058"/.063"	.058"/.063"
G.W./N.W.	7.9kg/6.1kg	8.1kg/6.3kg	8.4kg/6.5kg

CE

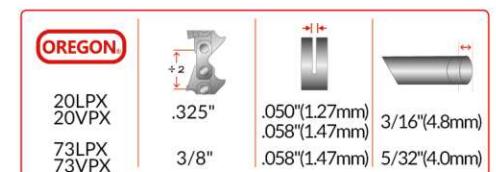

**PROFESSIONAL CHAINSAW**
**NT6020**

Low vibration chainsaw with extremely low temperature, benefits from new technology. Better damping design on the shock absorption improves the performance of machines and reduce the user's fatigue when using. Ideal for tree maintenance and timber logging.


**55.6CC** Displacement

**3.1KW** Rated Power

**5.3KG** Dry Weight

**HANDY AIR FILTER COVER**

Large space inside eases air cooling. Air filter knob is set inside to provide excellent sealing.


**NEW DESIGN STARTER ASSY**

Two-piece and two-color design for starter cover makes it unique and nice in look.

**TOOL-FREE FUEL TANK**

Tool-free fuel tank cap and oil tank cap.


**TOOLS HIDDEN DESIGN**

Space available for placing necessary tools on the bottom of chain saw.


**GASOLINE CHAINSAW**

**ANTI Vibration** **HIGH TORQUE** **DIGITAL** **ECO**

	<b>NT4520</b>	<b>NT5220</b>	<b>NT5820</b>	<b>NT6020</b>
Power Type	2 Stroke, Air Cooling			
Cylinder Diameter x Stroke	43x31mm	45x31mm	45.2x34mm	45x35mm
Displacement	45cc	49.3cc	54.5cc	55.6cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm	3.1kW/9500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)			
Fuel Tank Capacity	590ml	590ml	590ml	590ml
Engine Oil Tank Capacity	260ml	260ml	260ml	260ml
Guide Bar Size	16"-20"	18"-22"	18"-24"	20"-28"
Chain Pitch	.325"	.325"	.325"	.325"
Chain Gauge	.058"	.058"	.058"	.058"
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg	6.6kg/5.2kg	7.1kg/5.3kg
CE	<b>EURO V</b>	<b>EURO V</b>	<b>EURO V</b>	<b>EURO V</b>

<b>OREGON</b>			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)

## PROFESSIONAL CHAINSAW NT5851/ES



**NEW  
PRODUCT**



The NEWTOP 58cc Petrol 20" Chainsaw has been engineered and manufactured to NEWTOP's high standard for dependability, ease of operation, and operator safety. When properly cared for, it will give you years of rugged, trouble-free performance.

**54.5CC** Displacement

**2.2KW** Rated Power

**5.2KG** Dry Weight

**200** hours  
**CONTINUE  
WORK OVER**



### COMPATIBLE VARIOUS STARTERS

Different appearances can be changed according to requirements.

**EASY  
STARTER**



GASOLINE CHAINSAW



**EXTENDED  
WARRANTY**

**ANTI VIBRATION**

**HIGH TORQUE**

**DIGITAL DISPLAY**


**ANTI-THROTTLE**

**NT4551/ES**

**NT5251/ES**

**NT5851/ES**

Power Type	2 Stroke, Air Cooling	45x31mm	45.2x34mm
Cylinder Diameter x Stroke	45x31mm	49.3cc	54.5cc
Displacement	45cc	2.0kW/7500rpm	2.2kW/8000rpm
Power & Relevant Speed	1.7kW/7500rpm	25: 1 (Gasoline25:Two-cycle Oil 1)	
Fuel Mixture Ratio	550ml	550ml	550ml
Fuel Tank Capacity	260ml	260ml	260ml
Engine Oil Tank Capacity	16"-20"	16"-22"	16"-24"
Guide Bar Size	3/8"/.325"	3/8"/.325"	3/8"/.325"
Chain Pitch	.050"/.058"	.050"/.058"	.050"/.058"
Chain Gauge	6.5kg/5.1kg	6.5kg/5.1kg	6.6kg/5.2kg
CE	EURO V	EURO V	EURO V

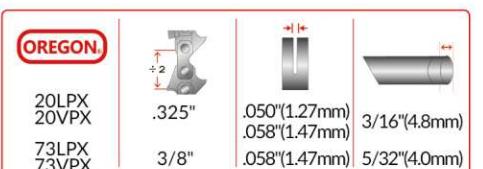

**PROFESSIONAL CHAINSAW**
**NT5852/ES**

The NEWTOP petrol chainsaw with its powerful 2-stroke engine, is a must for any serious gardener, farmers & groundsman. Added safety and performance features like anti-kickback, anti-vibration, and an automatic chain oiler will make the task at hand effortless.

**54.5CC** Displacement

**2.2KW** Rated Power

**5.2KG** Dry Weight

**ALLOY CHAIN**

Hardened alloy chain, lower kick-back, more durable


**COMPATIBLE VARIOUS STARTERS**

Different appearances can be changed according to requirements.

**TOOL-FREE FUEL TANK**

Tool-free fuel tank cap and oil tank cap.

**LOW EMISSION**

Compliant with emission standards to low fuel consumption, suitable for various purposes.


**EASY  
STARTER**

**GASOLINE CHAINSAW**

**NT4552/ES**
**NT5252/ES**
**NT5852/ES**

Power Type	2 Stroke, Air Cooling
Cylinder Diameter x Stroke	43x31mm
Displacement	45cc
Power & Relevant Speed	1.7kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	550ml
Engine Oil Tank Capacity	260ml
Guide Bar Size	16"-20"
Chain Pitch	3/8"/.325"
Chain Gauge	.050"/.058"
G.W./N.W.	6.5kg/5.1kg

**CE**
**EURO V**
**EURO V**
**EURO V**

OREGON			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)

**PROFESSIONAL CHAINSAW**  
**NT5853-ES**

**NEW  
PRODUCT**

**54.5CC** Displacement

**2.2KW** Rated Power

**5.2KG** Dry Weight

**200** hours  
**CONTINUE  
WORK OVER**
**WINDOW ON FUEL TANK**

With small window on fuel tank to check the remaining fuel volume.


**DAMPING SYSTEM**

The damping system dampens vibrations from the engine, significantly reducing vibrations at the handle.

**TOOLS HIDDEN DESIGN**

Space available for placing necessary tools on the bottom of chain saw.


**ALLOY CHAIN**

Hardened alloy chain, lower kick-back, more durable


**EASY  
STARTER**

Start easily and quickly. Over 10,000 starting times.



**TOOL-FREE FUEL TANK**  
**LOW EMISSION**

Tool-free fuel tank cap and oil tank cap. Compliant with emission standards to low fuel consumption, suitable for various purposes.


**GASOLINE CHAINSAW**

**NT4553-ES**      **NT5253-ES**      **NT5853-ES**

Power Type	2 Stroke, Air Cooling	45×31mm	45.2×34mm
Cylinder Diameter × Stroke	43×31mm	45×31mm	45.2×34mm
Displacement	45cc	49.3cc	54.5cc
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm
Fuel Mixture Ratio	25: 1 (Gasoline:Two-cycle Oil 1)	550ml	550ml
Fuel Tank Capacity	550ml	260ml	260ml
Engine Oil Tank Capacity	260ml	16"-22"	16"-24"
Guide Bar Size	16"-20"	3/8"/.325"	3/8"/.325"
Chain Pitch	3/8"/.325"	.050"/.058"	.050"/.058"
Chain Gauge	.050"/.058"	6.5kg/5.1kg	.050"/.058"
G.W./N.W.	6.5kg/5.1kg		6.6kg/5.2kg
CE	EURO V	EURO V	EURO V

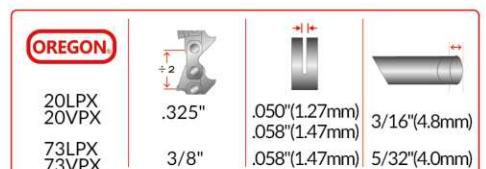

**PROFESSIONAL CHAINSAW**  
**NT5860**

**54.5CC** Displacement

**2.2KW** Rated Power

**5.2KG** Dry Weight

**HANDY AIR FILTER COVER**

Transparent top cover to check the air filter easily.


**TOOL-FREE FUEL TANK**  
 Tool-free fuel tank cap and oil tank cap.

**TOOLS HIDDEN DESIGN**

Space available for placing necessary tools on the bottom of chain saw.


**NEWTOP**

**EXTENDED WARRANTY**


ANTI Vibration

HIGH TORQUE

DIGITAL ignition


**NT4560**
**NT5260**
**NT5860**

Power Type	2 Stroke, Air Cooling	43×31mm	45×31mm	45.2×34mm
Cylinder Diameter × Stroke				
Displacement	45cc	49.3cc	54.5cc	
Power & Relevant Speed	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm	
Fuel Mixture Ratio	25: 1 (Gasoline:Two-cycle Oil 1)			
Fuel Tank Capacity	550ml	550ml	550ml	
Engine Oil Tank Capacity	260ml	260ml	260ml	
Guide Bar Size	16"-20"	16"-22"	16"-24"	
Chain Pitch	3/8"/.325"	3/8"/.325"	3/8"/.325"	
Chain Gauge	.050"/.058"	.050"/.058"	.050"/.058"	
G.W./N.W.	6.5kg/5.1kg	6.5kg/5.1kg	6.5kg/5.1kg	
CE	EURO V		EURO V	EURO V

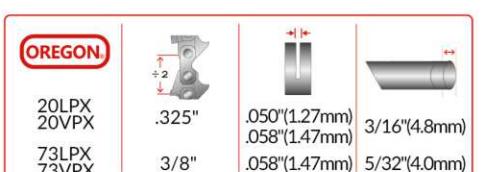

## PROFESSIONAL CHAINSAW

## NT5860-ES

The NEWTOP petrol chainsaw with its powerful 2-stroke engine, is a must for any serious gardener, farmers & groundsman. This model is with easy starter.

**54.5CC** Displacement

**2.2KW** Rated Power

**5.3KG** Dry Weight



## HANDY AIR FILTER COVER

Transparent top cover to check the air filter easily.



## TOOL-FREE FUEL TANK

Tool-free fuel tank cap and oil tank cap.



## WINDOW ON FUEL TANK

With small window on fuel tank to check the remaining fuel volume.



## TOOLS HIDDEN DESIGN

Space available for placing necessary tools on the bottom of chain saw.



GASOLINE CHAINSAW




ANTI VIBRATION HIGH TORQUE DIGITAL CONTROL

## NT4560-ES

## NT5260-ES

## NT5860-ES

Power Type	2 Stroke, Air Cooling
Cylinder Diameter x Stroke	43x31mm
Displacement	45cc
Power & Relevant Speed	1.7kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline:Two-cycle Oil 1)
Fuel Tank Capacity	550ml
Engine Oil Tank Capacity	260ml
Guide Bar Size	16"-20"
Chain Pitch	3/8"/.325"
Chain Gauge	.050"/.058"
G.W./N.W.	6.6kg/5.2kg
CE	EURO V
	EURO V
	EURO V

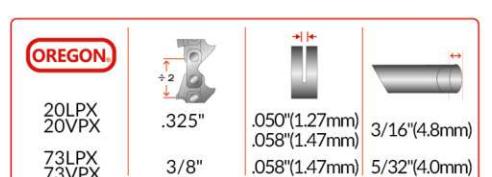

## PROFESSIONAL CHAINSAW



### NT5800-ES

The NEWTOP 58cc Petrol 20" Chainsaw has been engineered and manufactured to NEWTOP's high standard for dependability, ease of operation, and operator safety. When properly cared for, it will give you years of rugged, trouble-free performance.

**54.5CC** Displacement

**2.2KW** Rated Power

**5.3KG** Dry Weight



#### EASY STARTER

Easy-to-start design, faster and smoother start up.

#### DIRECT AIR INJECTION CARBURETOR

Direct injection carburetor, better atomization effect, more complete combustion, and more stable output power.

#### BRAND NEW AIR FILTER SYSTEM

The air enters in vortex, throwing out the heavier particles in the air, helps prolong the service life of the air filter.

#### BALANCED DESIGN

Balanced design for ease of use and maneuverability.



GASOLINE CHAINSAW



ANTI-VIBRATION HIGH TORQUE DIGITAL CONTROL

#### NT4510-ES

#### NT5210-ES

#### NT5800-ES

Power Type	2 Stroke, Air Cooling	45×31mm	45.2×34mm
Cylinder Diameter × Stroke	45cc	49.3cc	54.5cc
Displacement	1.7kW/7500rpm	2.0kW/7500rpm	2.2kW/8000rpm
Power & Relevant Speed	25: 1 (Gasoline 25: Two-cycle Oil 1)	550ml	550ml
Fuel Mixture Ratio	260ml	260ml	260ml
Fuel Tank Capacity	16"-20"	16"-22"	16"-24"
Engine Oil Tank Capacity	3/8"/.325"	3/8"/.325"	3/8"/.325"
Guide Bar Size	.050"/.058"	.050"/.058"	.050"/.058"
Chain Pitch	6.6kg/5.2kg	6.6kg/5.2kg	6.7kg/5.3kg
Chain Gauge			
G.W./N.W.			

CE

EURO V

EURO V

EURO V



## PROFESSIONAL CHAINSAW

### NT5800

Powerful chain saw, suitable for most conditions like harvesting, forestry, agriculture and gardening. It combines rugged reliability with convenient and comfortable operation mode.



**54.5CC** Displacement

**2.2KW** Rated Power

**5.2KG** Dry Weight



#### DIRECT AIR INJECTION CARBURETOR

Direct injection carburetor, better atomization effect, more complete combustion, and more stable output power.

#### BRAND NEW AIR FILTER SYSTEM

The air enters in vortex, throwing out the heavier particles in the air, helps prolong the service life of the air filter.

#### BALANCED DESIGN

Balanced design for ease of use and maneuverability.



GASOLINE CHAINSAW



#### NT4510

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	43×31mm
Displacement	45cc
Power & Relevant Speed	1.7kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline:Two-cycle Oil 1)
Fuel Tank Capacity	550ml
Engine Oil Tank Capacity	260ml
Guide Bar Size	16"-20"
Chain Pitch	3/8"/.325"
Chain Gauge	.050"/.058"
G.W./N.W.	6.5kg/5.1kg

#### NT5210

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	45×31mm
Displacement	49.3cc
Power & Relevant Speed	2.0kW/7500rpm
Fuel Mixture Ratio	25: 1 (Gasoline:Two-cycle Oil 1)
Fuel Tank Capacity	550ml
Engine Oil Tank Capacity	260ml
Guide Bar Size	16"-22"
Chain Pitch	3/8"/.325"
Chain Gauge	.050"/.058"
G.W./N.W.	6.5kg/5.1kg

#### NT5800


Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	45.2×34mm
Displacement	54.5cc
Power & Relevant Speed	2.2kW/8000rpm
Fuel Mixture Ratio	25: 1 (Gasoline:Two-cycle Oil 1)
Fuel Tank Capacity	550ml
Engine Oil Tank Capacity	260ml
Guide Bar Size	16"-24"
Chain Pitch	3/8"/.325"
Chain Gauge	.050"/.058"
G.W./N.W.	6.6kg/5.2kg

CE

EURO V

EURO V

EURO V

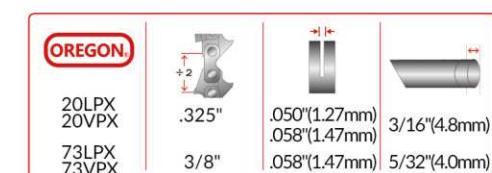



## PROFESSIONAL CHAINSAW



## NT4200

With quick chain tensioning and easy starter, long-life air filter system for long cleaning intervals, tool-less fuel caps for safe and easy refueling, environmentally-friendly.

40.2CC Displacement

1.7KW Rated Power

4.4KG Dry Weight




NT4200



Power Type	2 Stroke, Air Cooling
Cylinder Diameter x Stroke	40x32mm
Displacement	40.2cc
Power & Relevant Speed	1.7kW/8500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	410ml
Engine Oil Tank Capacity	200ml
Guide Bar Size	14"-18"
Chain Pitch	3/8"/.325"
Chain Gauge	.050"
G.W./N.W.	5.7kg/4.4kg

CE

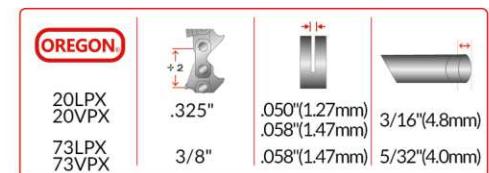

+ 15%

CUTTING EFFICIENCY INCREASED BY 15%\*

\*compared with a similar product in the market



NT3700

Power Type	2 Stroke, Air Cooling
Cylinder Diameter x Stroke	38x32mm
Displacement	36.3cc
Power & Relevant Speed	1.5kW/8500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	410ml
Engine Oil Tank Capacity	200ml
Guide Bar Size	14"-18"
Chain Pitch	3/8"/.325"
Chain Gauge	.050"
G.W./N.W.	5.7kg/4.4kg

+ 15%

REDUCING WEIGHT BY 15%\*

\*compared with NEWTOP same displacement products

**PROFESSIONAL CHAINSAW**
**NT3200**

The NEWTOP NT3200 Chainsaw goes back to basics with improved engine airflow and guard design. Quick pruning, felling of small trees, and clearing of fallen branches after a storm.



**31.8CC** Displacement

**1.3KW** Rated Power

**4.1KG** Dry Weight

**NT3200**

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	38×28mm
Displacement	31.8cc
Power & Relevant Speed	1.3kW/9000rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	250ml
Engine Oil Tank Capacity	145ml
Guide Bar Size	14"-16"
Chain Pitch	3/8"
Chain Gauge	.050"
G.W./N.W.	5.9kg/4.1kg

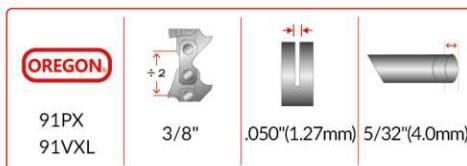**CE**

**PROFESSIONAL CHAINSAW**
**NT2510**

New design. Light-weight Chain saw for universal use with 2-stroke petrol engine. Sturdy, light and easy to handle, this chainsaw is ideal for both domestic and professional use. Necessary tool for gardening work, for pruning small trees and bushes, as well as for preparing firewood.



**25CC** Displacement

**0.8KW** Rated Power

**2.3KG** Dry Weight

**NT2510**


Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	34×28mm
Displacement	25cc
Power & Relevant Speed	0.8kW/8500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	180ml
Engine Oil Tank Capacity	140ml
Guide Bar Size	8"/10"
Chain Pitch	3/8"
Chain Gauge	.050"
G.W./N.W.	2.8kg/2.3kg

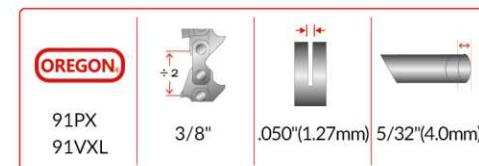**CE EURO V**

**NT2510-ES**

Power Type	2 Stroke, Air Cooling
Cylinder Diameter × Stroke	34×28mm
Displacement	25.4cc
Power & Relevant Speed	1.0kW/8500rpm
Fuel Mixture Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Fuel Tank Capacity	230ml
Engine Oil Tank Capacity	160ml
Guide Bar Size	10"-14"
Chain Pitch	3/8"
Chain Gauge	.050"
G.W./N.W.	4.9kg/3.8kg



## PROFESSIONAL BRUSH CUTTER

## NTB450B

2022 new model, with our NEWTOP own patent, starter logo embossed instead of paper sticker, more stable and attractive.




**41.5CC** Displacement

**1.47KW** Rated Power

**7.6KG** Dry Weight



**NEW**

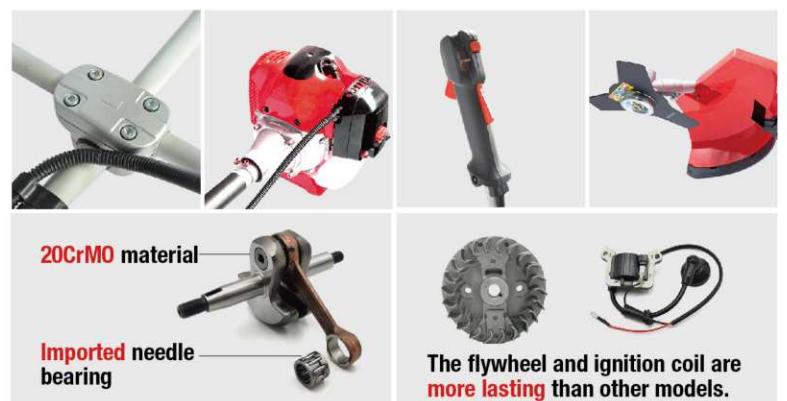


ANTIVibration  
HIGH TORQUE  
DIGITAL  
STATOR COIL

**NTB450B**

Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

CE



**NTB500B**

G45  
41.5cc  
1.47kW/7800rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
900ml  
26mm/28mm  
10kg/7.6kg

G50  
45.7cc  
1.65kW/7500rpm  
900ml  
26mm/28mm  
10.1kg/7.7kg



**+ 20%**



CUTTING EFFICIENCY INCREASED BY 20%\*

\*compared with a similar product in the market

Light Trimming

Medium Trimming

Heavy Trimming

## PROFESSIONAL BRUSH CUTTER

## NTB520A

Compact and smooth exterior design, more user-friendly and much easier to operate. Reversible air filter cover makes it easy for installing and replacement of parts. Stable and powerful engine, proper for most forestry, agricultural and emergency work.



51.7CC Displacement

1.65KW Rated Power

7.8KG Dry Weight



## W HANDLE

Brand new rubber W handle, with a comfortable grip.



## AIR FILTER SYSTEM

The air filter can be quickly replaced by the convenient air filter design.

## HIGH-QUALITY GEAR BOX

High-quality gear box, used with the blade, easy to cut branches.



## POWER ENGINE

with high configuration, stable power output, suitable for different usage scenarios.



GASOLINE BRUSH CUTTER




## NTB520A

## NTB430A

## NTB330A

Match Engine	1E44FA	1E40F-5A	1E36F-2A
Displacement	51.7cc	42.7cc	32.6cc
Power & Relevant Speed	1.65kW/7600rpm	1.34kW/8000rpm	1.1kW/7500rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)		
Capacity	1300ml	1300ml	850ml
Diameter Of Al.Pipe	26mm	26mm	26mm
G.W./N.W.	10kg/7.8kg	10kg/7.8kg	9.7kg/7.5kg

CE



Light Trimming

Medium Trimming

Heavy Trimming

## PROFESSIONAL BRUSH CUTTER

## NTB520B

This petrol brush cutter from NEWTOP enjoys a heavy-duty 52cc two-stroke engine, delivering 3.0 horsepower of torque. It is ideal for domestic customers with larger gardens or professional landscapers.



51.7CC Displacement

1.65KW Rated Power

7.6KG Dry Weight



## HIGH-QUALITY GEAR BOX

High-quality gear box, used with the blade, easy to cut branches.



## DAMPING SYSTEM

Anti-Vibration System provides maximum comfort to get more done with less fatigue.



GASOLINE BRUSH CUTTER



## NTB520B

Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

1E44FA  
51.7cc  
1.65kW/7600rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
900ml  
26mm  
9.8kg/7.6kg

## NTB430B

1E40F-5B  
42.7cc  
1.34kW/8000rpm  
900ml  
26mm  
9.8kg/7.6kg

## NTB330B

1E36F-2B  
32.6cc  
1.1kW/7500rpm  
750ml  
26mm  
9.5kg/7.3kg



Light Trimming



Medium Trimming



Heavy Trimming

## PROFESSIONAL BRUSH CUTTER

## NTB520C

This versatile petrol brushcutter boasts a punchy 52cc two-stroke air-cooled engine, which delivers 2.0 horsepower. The handlebar and harness ensure easy handling and reduce the strain on the back and muscles.



51.7CC Displacement

1.65KW Rated Power

8.3KG Dry Weight




## NTB520C

## NTB430C

Match Engine	1E44FA
Displacement	51.7cc
Power & Relevant Speed	1.65kW/7600rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Capacity	900ml
Diameter Of Al.Pipe	26mm
G.W./N.W.	10.4kg/8.3kg

CE



## PROFESSIONAL BRUSH CUTTER

## NTB520E

The NEWTOP NTB520E is a lightweight, yet powerful straight shaft petrol Brush cutter. Smart pull Recoil - this feature allows effortless starting by reducing the resistance on the Starter rope. Metal 255mm three - toothed blade for tackling tougher jobs.



51.7CC Displacement

1.65KW Rated Power

7.8KG Dry Weight




## NTB520E

## NTB430E

Match Engine	1E44FA
Displacement	51.7cc
Power & Relevant Speed	1.65kW/7600rpm
Mixed Fuel Ratio	25: 1 (Gasoline25:Two-cycle Oil 1)
Capacity	1300ml
Diameter Of Al.Pipe	26mm
G.W./N.W.	10kg/7.8kg

CE



Light Trimming



Medium Trimming



Heavy Trimming

## PROFESSIONAL BRUSH CUTTER

## NTB143

Light weight Brushcutter  
easy-start,easy maintenance,  
easy-operation.

41.5CC Displacement

1.47KW Rated Power

7.8KG Dry Weight




## NTB143



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

1E40F-9  
41.5cc  
1.47kW/7800rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
950ml  
28mm  
10kg/7.8kg



## PROFESSIONAL BRUSH CUTTER

## NTB541

Light weight Brushcutter  
easy-start,easy maintenance,  
easy-operation.

41.5CC Displacement

1.47KW Rated Power

7.8KG Dry Weight





## NTB541



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

1E40F-9  
41.5cc  
1.47kW/7800rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
940ml  
28mm  
10kg/7.8kg



Light Trimming



Medium Trimming



Heavy Trimming

**PROFESSIONAL BRUSH CUTTER**
**NTB500**

Low fuel consumption, more fuel efficient, more durable.  
New paper air filter, good filtering effect.  
Aluminum plate muffler, low noise.  
Diaphragm carburetor, better atomization effect.

**41.5CC** Displacement

**1.47KW** Rated Power


**7.8KG** Dry Weight

**HIGH TORQUE**

**NTB500**

**NTB800**


Match Engine	40E	50E
Displacement	40.2cc	50.8cc
Power & Relevant Speed	1.47kW/7500rpm	2.0kW/7500rpm
Mixed Fuel Ratio	25: 1 (Gasoline)	25: Two-cycle Oil 1)
Capacity	1150ml	1150ml
Diameter Of Al.Pipe	28mm	28mm
G.W./N.W.	11kg/9.5kg	11kg/9.5kg

**CE**

**PROFESSIONAL BRUSH CUTTER**
**NTB415**

Low fuel consumption, more fuel efficient, more durable.  
New paper air filter, good filtering effect.  
Aluminum plate muffler, low noise.  
Diaphragm carburetor, better atomization effect.

**41.5CC** Displacement

**1.47KW** Rated Power

**7.8KG** Dry Weight

**HIGH TORQUE**

**NTB415**


Match Engine	1E40F-9
Displacement	41.5cc
Power & Relevant Speed	1.47kW/8000rpm
Mixed Fuel Ratio	25: 1 (Gasoline)
Capacity	930ml
Diameter Of Al.Pipe	28mm
G.W./N.W.	10kg/7.8kg

**CE**


Light Trimming

Medium Trimming

Heavy Trimming

## PROFESSIONAL BRUSH CUTTER

## NTS140CG

NEWTOP NTS140CG are developed to handle many years of tough operation. The engine deliver high power ensure that you can work efficiently in all conditions. If you choose our NTS140CG, no noise will disturb the surroundings.

35.8CC Displacement

0.9KW Rated Power

7.0KG Dry Weight



## HIGH-QUALITY GEAR BOX

Specially designed gear box enables smooth operation. Powerful engine ensures efficient operation.



## ALLOY HARD AXIS

Super wear-resistant carbide hard shaft provides stable transmission.

## 4 STROKE ENGINE

Four-stroke engine features the machine with stable operation, low noise and longevity.



## PROFESSIONAL BRUSH CUTTER

## NTS140BG

Elaborately matched high quality carburetor enables stable power output. Super wear-resistant carbide hard shaft provides stable transmission. Backpack brush cutters are easily used in hills, terraces etc.

35.8CC Displacement

0.9KW Rated Power

8.0KG Dry Weight




## NTS140CG

## NTS140BG

Match Engine  
Displacement  
Power & Relevant Speed  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

GX35  
35.8cc  
0.9kW/6800rpm  
500ml  
28mm  
8.8kg/7kg

GX35  
35.8cc  
0.9kW/6800rpm  
500ml  
28mm  
9.8kg/8kg

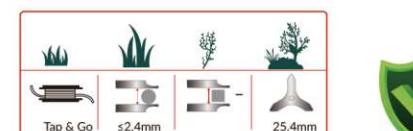

Light Trimming

Medium Trimming

Heavy Trimming

## PROFESSIONAL BRUSH CUTTER

## NTB260A

Small size and light weight.  
Easy to start, stable performance.  
Low fuel consumption, one-handed operation.  
Suitable for the elderly and women.

25.4CC Displacement

0.65KW Rated Power

6.5KG Dry Weight



## NTB260A



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

1E34F  
25.4cc  
0.65kW/7500rpm  
25: 1 (Gasoline25:Two-cycle Oil 1)  
650ml  
26mm  
8kg/6.5kg

CE



Light Trimming

Medium Trimming

Heavy Trimming

## PROFESSIONAL BRUSH CUTTER

## NTB260B

Powered by a 26cc air-cooled 2-stroke petrol engine, the NTB260B grass trimmer features easy recoil pull start, making light work of trimming all types of grass, nettles, shrubs and overgrowth.

25.4CC Displacement

0.85KW Rated Power

6.5KG Dry Weight



**Double Layer Air Filter**  
The newly designed air filter has a double-layer filtering effect. (equipped with mesh filter + air filter sponge).




**New Design**  
Compared with the old one, this one looks more user-friendly.

## NTB260B



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

CE



## NTB320B



Match Engine  
Displacement  
Power & Relevant Speed  
Mixed Fuel Ratio  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W.

CE



**+ 23%**

CUTTING EFFICIENCY INCREASED BY 23%\*

\*compared with a similar product in the market



## POLE SAW


**NEWTOP**

### PROFESSIONAL POLE SAW



#### NTPS260A

Low fuel consumption and stable. Tube of different length available. Small weight and easy for operation. Widely used for cutting trees in gardens and along the streets...

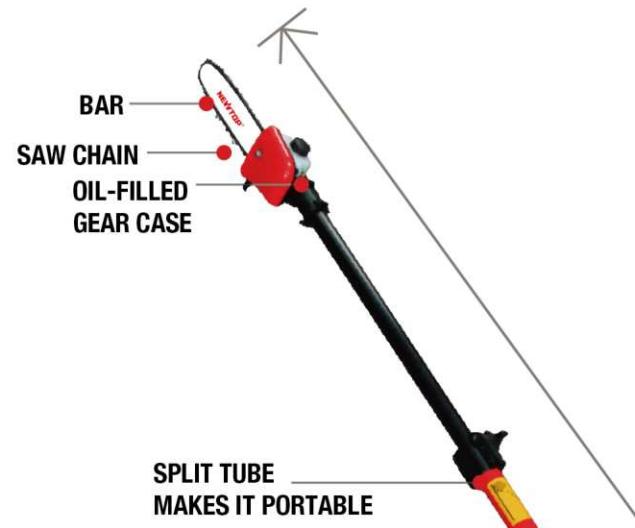**26CC** Displacement**0.65KW** Rated Power**6.0KG** Dry Weight**NTPS260A**

Match Engine  
Displacement  
Power & Relevant Speed  
Capacity  
Diameter Of Al.Pipe  
G.W./N.W

1E34F  
25.4cc  
0.65kW/7500rpm  
500ml  
26mm  
8kg/6kg

CE

USING STEEL FINISHING TUBE  
CAN CONVEY THE ENGINE POWER  
TO THE GUIDE BAR PERFECTLY


4300mm



THROTTLE OPERATION BUTTON

STRAP

ENGINE

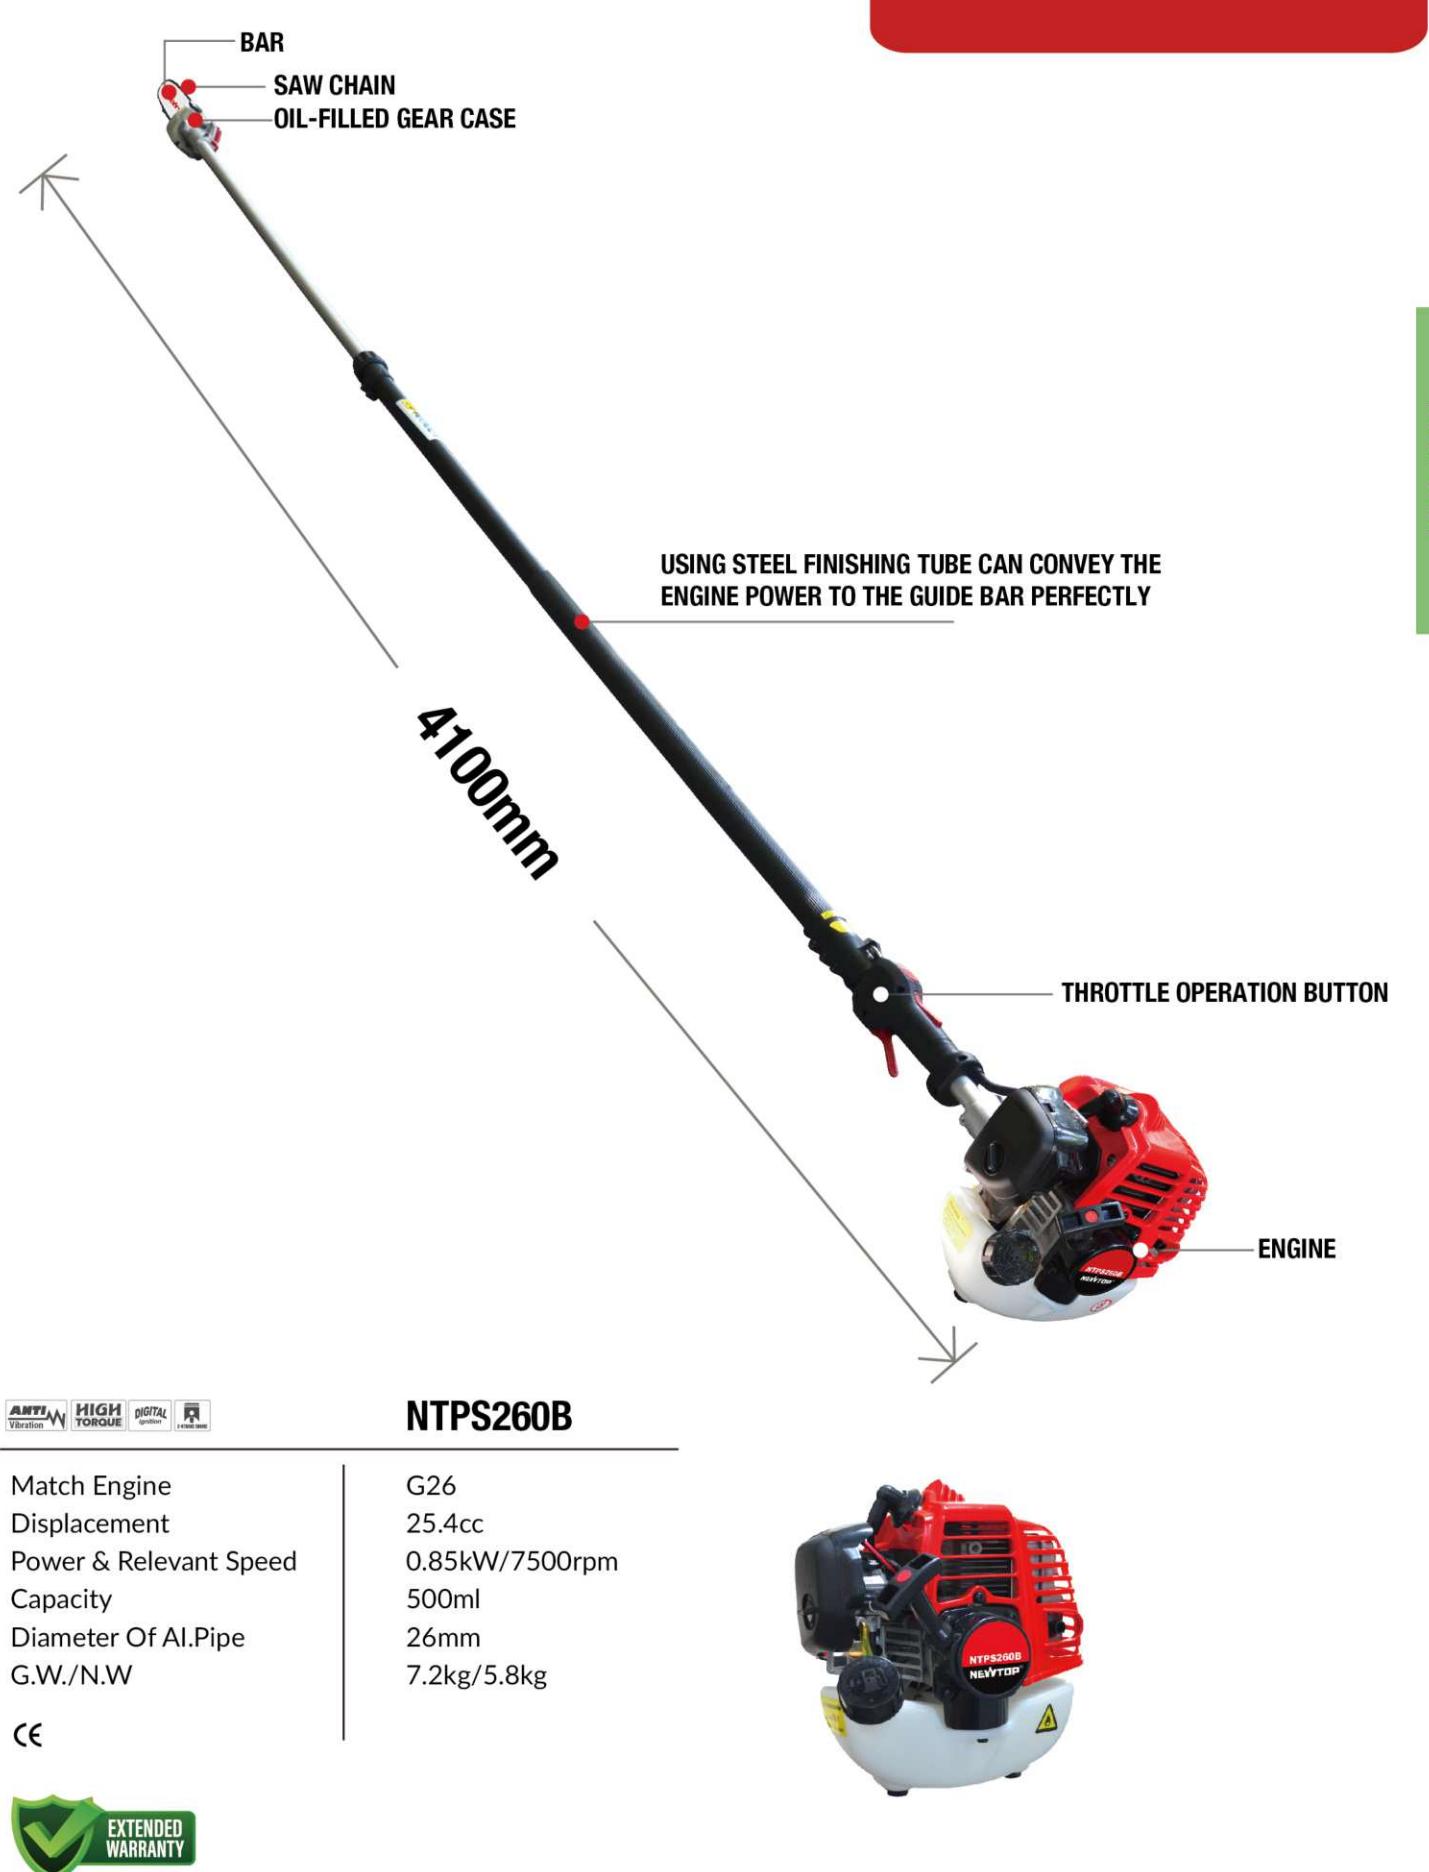

## PROFESSIONAL MULTIFUNCTION TOOLS

## NTMU520B4IN1

This flexible gardening tool combines a brush cutter, pole pruner, grass trimmer and hedge trimmer into one convenient and affordable package. Based on a reliable air-cooled, 2 stroke engine this landscaping multi-tool is both efficient and packed with enough power to make even the most demanding of projects a breeze.

**51.7CC** Displacement

**1.65KW** Rated Power

**15.7KG** Dry Weight


- A** POLE SAW  
**B** HEDGE TRIMMER

- C** EXTENSION SHAFT  
**D** BRUSH CUTTER



## NTMU520B4IN1



Engine Type  
 Displacement  
 Power & Relevant Speed  
 Clutch Speed  
 Transmission Bar  
 Weight

2 Stroke  
 51.7cc  
 1.65kW/7600rpm  
 4500rpm  
 26mm  
 15.7kg





## SPRayers

**NEWTOP**

HAND &amp; GASOLINE SPRAYER



### PROFESSIONAL SPRAYERS



#### NTS428

NEWTOP NTS428 mist duster is a machine for professional use, but at the same time very simple to use, because you just have to regulate the throttle and the tap.

**77CC** Displacement**3.6KW** Rated Power**11.5KG** Dry Weight

#### NTS428



Engine  
Rated Out Put Power  
Displacement  
Carburator Type  
Container Capacity  
Fuel Tank Capacity  
Max Air Flow Rate  
Horizontal Reach  
G.W./N.W.  
CE

2 Stroke  
3.6kW/5.0hp  
77cc  
Float or Diaphragm  
17L  
1.9L  
1300m<sup>3</sup>/h  
20m  
13kg/11.5kg



### PROFESSIONAL SPRAYERS



#### NTS423

It breaks the spray into very small droplets and distributes them evenly over a large area. A mist blower uses less chemical than a more traditional coarse liquid spray.

**72.3CC** Displacement**3.0KW** Rated Power**11.5KG** Dry Weight

#### NTS423



Engine  
Rated Out Put Power  
Displacement  
Carburator Type  
Container Capacity  
Fuel Tank Capacity  
Max Air Flow Rate  
Horizontal Reach  
G.W./N.W.  
CE

2 Stroke  
3.0kW/4.1hp  
72.3cc  
Float  
12L  
1.4L  
1300m<sup>3</sup>/h  
15m  
13kg/11.5kg

[www.newtoptools.com](http://www.newtoptools.com)



## SPRAYERS



## PROFESSIONAL SPRAYERS

### NTS420

Ideal for distributing liquid or solid insecticides, fertilizers or herbicides, the SURTEC NTS420 easily converts from misting to dusting applications without special tools or additional equipment. .

**56.5CC** Displacement

**2.6KW** Rated Power

**10.6KG** Dry Weight



### NTS420



Engine	2 Stroke
Rated Out Put Power	2.6kW
Displacement	56.5cc
Carburator Type	Diaphragm
Container Capacity	14L/20L
Fuel Tank Capacity	1.5L
Max Air Flow Rate	1300m <sup>3</sup> /h
Horizontal Reach	15m
G.W./N.W.	12kg/10.6kg

CE





## SPRAYERS

**NEWTOP**

HAND &amp; GASOLINE SPRAYER



### PROFESSIONAL SPRAYERS

#### NTS3WF-3



The NEWTOP NTS3WF-3 mist duster construction design of the machine is modern, the most parts of the machine are all made of plastic and light aluminum alloy, hence the machine is lighter, anti-corrosion and comfortable with carrying it.

**41.5CC** Displacement**2.13KW** Rated Power**11.5KG** Dry Weight

#### NTS3WF-3

ANTI VIBRATION

HIGH TORQUE

DIGITAL

FUEL LINE

Engine	2 Stroke
Rated Out Put Power	2.13kW
Displacement	41.5cc
Carburator Type	Float
Container Capacity	14L/20L
Fuel Tank Capacity	1.3L
Max Air Flow Rate	1100m <sup>3</sup> /h
Horizontal Reach	15m
G.W./N.W.	13.5kg/11.5kg

CE

[www.newtoptools.com](http://www.newtoptools.com)

### PROFESSIONAL SPRAYERS

#### NTS4025



They are ideal to spray insecticides, pesticides, fungicides, herbicides etc. in field areas to protect the crop from pest attack. These Sprayers have multiple applications, and are widely used in agriculture, horticulture, sericulture, plantations, forestry, gardens etc.

**35.8CC** Displacement**1.0KW** Rated Power**12KG** Dry Weight

#### NTS4025

ANTI VIBRATION

HIGH TORQUE

DIGITAL

FUEL LINE

Engine	4 Stroke
Rated Out Put Power	1.0kW
Displacement	35.8cc
Carburator Type	Diaphragm
Container Capacity	25L
Fuel Tank Capacity	0.63L
Horizontal Reach	15m
G.W./N.W.	13kg/12kg

[www.newtoptools.com](http://www.newtoptools.com)



## PROFESSIONAL SPRAYERS

## NTS768



Knapsack Power Sprayer 768 is easy to use and highly durable. Designed in sync with the industrial standards, these sprayers are immensely used for garden spraying-weed, pest control, liquid fertilizing and plant leaf polishing.

26CC Displacement

0.75KW Rated Power

10KG Dry Weight

## NTS768

ANTI Vibration

HIGH

TORQUE

DIGITAL

Sprocket

Pump

Engine	2 Stroke
Rated Out Put Power	0.75kW
Displacement	26cc
Carburator Type	Diaphragm
Container Capacity	25L
Fuel Tank Capacity	0.65L
Horizontal Reach	15m
G.W./N.W.	12kg/10kg

CE



## PROFESSIONAL SPRAYERS

## NTS767



This backpack gasoline power sprayer is deliberately designed to make spray jobs more efficient and more convenient. It is generally used in plant protection treatment for vegetables, rice, sugarcane, fruit trees, coffee trees and etc. It is also very good to be used for public sanitation and disinfection because of its good movability.

31.3CC Displacement

0.7KW Rated Power

12.5KG Dry Weight

## NTS767

ANTI Vibration

HIGH

TORQUE

DIGITAL

Sprocket

Engine	139 - 4 Stroke
Rated Out Put Power	0.7kW
Displacement	31.3cc
Carburator Type	Diaphragm
Container Capacity	25L
Fuel Tank Capacity	0.65L
Horizontal Reach	15m
G.W./N.W.	14kg/12.5kg





## SPRAYERS

### PROFESSIONAL SPRAYERS

#### NTS20C5

The stable pump can easily be operated with one hand. The robust spray hose lets you achieve an even spray. You can turn spray nozzles to easily swap between a fine mist and a targeted stream.

**1.3M** Horizontal Range**Manual** Motor Type**0.2-0.4Mpa**  
Pressure**NTS20C5**

Chemist Tank Capacity	20L
Spraying Horizontal Range	1.3m
Motor Type	Manual
Hose Nozzle Type	Single and Double
Pressure	0.2-0.4Mpa
Weight	2.7kg



### PROFESSIONAL SPRAYERS

#### NTS20C2/NTS16C2

The stable pump can easily be operated with one hand. The robust spray hose lets you achieve an even spray. You can turn spray nozzles to easily swap between a fine mist and a targeted stream.

**1.3M** Horizontal Range**Manual** Motor Type**0.2-0.4Mpa**  
Pressure**NTS20C2****NTS16C2**

Chemist Tank Capacity	20L	16L
Spraying Horizontal Range	1.3m	1.3m
Motor Type	Manual	Manual
Hose Nozzle Type	Single and Double	Single and Double
Pressure	0.2-0.4Mpa	0.2-0.4Mpa
Weight	2.7kg	2.5kg

**HAND & GASOLINE SPRAYER****NEWTOP**

### PROFESSIONAL SPRAYERS

#### NTS20Z3/NTS16Z3

The stable pump can easily be operated with one hand. The robust spray hose lets you achieve an even spray. You can turn spray nozzles to easily swap between a fine mist and a targeted stream.

**1.3M** Horizontal Range**Manual** Motor Type**0.2-0.4Mpa**  
Pressure**NTS20Z3****NTS16Z3**

Chemist Tank Capacity	20L	16L
Spraying Horizontal Range	1.3m	1.3m
Motor Type	Manual	Manual
Hose Nozzle Type	Single and Double	Single and Double
Pressure	0.2-0.4Mpa	0.2-0.4Mpa
Weight	2.7kg	2.5kg



**PROFESSIONAL EARTH AUGER**
**NTEA520F**

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly bring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.

**51.7CC** Displacement

**1.6KW** Rated Power

**1.3L** Capacity

**METAL GEARBOX WITH GEAR REDUCTION**

Robust design and a ratio of appropriate reduction to achieve greater strength in the cut.

**HELICOIDAL DRILL**

Specific design to achieve the highest capacity of extraction of sand.

**EARTH AUGER BIT**

They get the highest resistance to drill on any surface.


**NTEA520F**

**HIGH TORQUE**
**DIGITAL**

Match Engine Displacement	1E44FA
Standard Power	51.7cc
Mixed Fuel Rate	1.6kW/7500rpm
Capacity	25:1
Drive Mode	1.3L
Drive Ration	Gear Drive
Drill	30:1
Module Of Gear	6"/8"/10"
CE	1.85

Optional drill bits:5"/6"

All models can be matched with different engines, arm frames and drill bits.


**PROFESSIONAL EARTH AUGER**
**NTEA520A**

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly bring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.

**51.7CC** Displacement

**1.6KW** Rated Power

**1.3L** Capacity

**NTEA520A**
**NTEA430A**

Match Engine	1E44FA
Displacement	51.7cc
Standard Power	1.6kW/7500rpm
Mixed Fuel Rate	25:1
Capacity	1.3L
Drive Mode	Gear Drive
Drive Ration	30:1
Drill	6"/8"/10"
Module Of Gear	1.85

Optional drill bits:5"/6"

All models can be matched with different engines, arm frames and drill bits.



**PROFESSIONAL EARTH AUGER**

**NTEA520B**

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly boring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.

**51.7CC** Displacement

**1.6KW** Rated Power

**1.3L** Capacity

**NTEA520B**
**NTEA430B**


Optional drill bits: 5"/6"/8"

All models can be matched with different engines, arm frames and drill bits.

**PROFESSIONAL EARTH AUGER**

**NTEA520E**

The NEWTOP Earth Auger is the perfect tool for quickly and effortlessly boring into the ground to set for Fence Posts, Trees, Poles, Shrubs etc.

**51.7CC** Displacement

**1.6KW** Rated Power

**1.3L** Capacity

**NTEA520E**
**NTEA430E**


Optional drill bits: 5"/6"/8"

All models can be matched with different engines, arm frames and drill bits.

**PROFESSIONAL TEA PICKING MACHINE**

**NTTH260**

The NEWTOP NTTH260 handheld tea plucker is mainly used for tea picking in mountain, hilly, plain and other terrain. It is produced with international advanced technology. It has the advantages of low noise, large air volume, stable quality and high production efficiency. It is an ideal machine for tea picking.

**25.4CC** Displacement

**0.8KW** Rated Power

**460L** Capacity

**NTTH260**


Single Cylinder, Two-stroke, Air-cooling

25.4cc

0.8kW/1.0hp/8000rpm

2800/3200r/min

650mm

10000r/min

Diaphragm

460ml (15.71 oz.)

25:1(Gasoline 40 : Two-cycle Oil 1)

Digital

11kg (23 lbs.)

13kg (28 lbs.)


**EXTENDED WARRANTY**



## PROFESSIONAL HEDGE TRIMMER

### NTH23S

-Double blade flywheel, better cooling effect. -High-precision P5 main bearing provides more power to the machine.  
-With front and rear spring shock-absorber, which perfectly reduce the vibration and fatigue of the arms.  
-The rear handle can be rotated to 180° for multi-angle adjustment.

**22.5CC** Displacement

**0.65KW** Rated Power

**650mm** Cutting Length



### NTH23S



Match Engine  
Bore Stroke  
Displacement  
Standard Power  
Carburetor Form  
Fuel Mixture Ratio  
Blade Cutting Length  
Weight

1E32F-B  
Φ32/28mm  
22.5cc  
0.65kW/7500rpm  
Diaphragm  
25:1  
650mm  
5.6kg



## PROFESSIONAL HEDGE TRIMMER

### NTH23B

-Double blade flywheel, better cooling effect. -High-precision P5 main bearing provides more power to the machine.  
-With front and rear spring shock-absorber, which perfectly reduce the vibration and fatigue of the arms.  
-The rear handle can be rotated to 180° for multi-angle adjustment.

**22.5CC** Displacement

**0.65KW** Rated Power

**650mm** Cutting Length



### NTH23B



Match Engine  
Bore Stroke  
Displacement  
Standard Power  
Carburetor Form  
Fuel Mixture Ratio  
Blade Cutting Length  
Weight

1E32F-B  
Φ32/28mm  
22.5cc  
0.65kW/7500rpm  
Diaphragm  
25:1  
650mm  
5.6kg



## PROFESSIONAL HEDGE TRIMMER

### NTH23C

-Double blade flywheel, better cooling effect. -High-precision P5 main bearing provides more power to the machine.  
-With front and rear spring shock-absorber, which perfectly reduce the vibration and fatigue of the arms.  
-The rear handle can be rotated to 180° for multi-angle adjustment.

**22.5CC** Displacement

**0.65KW** Rated Power

**650mm** Cutting Length



### NTH23C



Match Engine  
Bore Stroke  
Displacement  
Standard Power  
Carburetor Form  
Fuel Mixture Ratio  
Blade Cutting Length  
Weight

1E32F-B  
Φ32/28mm  
22.5cc  
0.65kW/7500rpm  
Diaphragm  
25:1  
650mm  
5.6kg





## PROFESSIONAL LEAF BLOWER



### NTLB260

Use NEWTOP 26cc petrol leaf blower to keep your garden and outside areas free of leaves and other debris. Featuring a 26cc engine, this extremely durable petrol leaf blower is powerful enough to tackle any task however big or small.

**25.4CC** Displacement

**0.75KW** Max Power

**72M/S** Air Speed

### NTLB260



Type	Portable
Discharging Capacity	25.4cc
Max Power	0.75kW
Air Speed	72m/s
Air Volume	520m <sup>3</sup> /h
Oil-tank Capacity	450ml
G.W./N.W.	5.8kg/4.5kg



## PROFESSIONAL LEAF BLOWER



### NTLB260A

This leaf blower is gasoline power tools. It is widely used in cleaning the leaves, dust, waste and grass which are cutting off.

**25.4CC** Displacement

**0.9KW** Max Power

**65M/S** Air Speed

### NTLB260A



Type	Portable
Discharging Capacity	25.4cc
Max Power	0.9kW
Air Speed	65m/s
Air Volume	820m <sup>3</sup> /h
Oil-tank Capacity	450ml
G.W./N.W.	6.2kg/5.0kg



## PROFESSIONAL LEAF BLOWER


### NTLB850A

This NEWTOP NTLB850A back pack leaf blower features an easy starting 75.6cc engine mounted on an ergonomically designed padded back pack allowing you to take the weight off your arms and support it on your back in comfort.

**75.6CC** Displacement

**3.7KW** Max Power

**86M/S** Air Speed

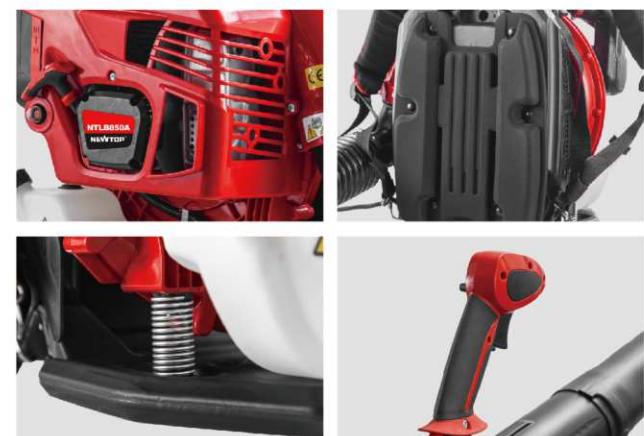

## PROFESSIONAL LEAF BLOWER

### NTLB850B

This NEWTOP NTLB850B back pack leaf blower features an easy starting 75.6cc engine mounted on an ergonomically designed padded back pack allowing you to take the weight off your arms and support it on your back in comfort.

**75.6CC** Displacement

**3.7KW** Max Power

**104M/S** Air Speed



### NTLB850A

Type	Backpack
Discharging Capacity	75.6cc
Max Power	3.7kW
Air Speed	86m/s
Air Volume	1850m <sup>3</sup> /h
Oil-tank Capacity	2100ml
G.W./N.W.	13.6kg/11kg

**CE** **EURO V** **EMC**



### NTLB650A

Type	Backpack
Discharging Capacity	63.3cc
Max Power	2.7kW
Air Speed	96m/s
Air Volume	1502m <sup>3</sup> /h
Oil-tank Capacity	2100ml
G.W./N.W.	12.8kg/10.5kg

### NTLB850B

Type	Backpack
Discharging Capacity	75.6cc
Max Power	3.7kW
Air Speed	104m/s
Air Volume	1692m <sup>3</sup> /h
Oil-tank Capacity	2600ml
G.W./N.W.	13.6kg/11kg

**CE** **EURO V** **EMC**




**PROFESSIONAL WATER PUMP**
**NTLB850C**

This NEWTOP NTLB850C back pack leaf blower features an easy starting 75.6cc engine mounted on an ergonomically designed padded back pack allowing you to take the weight off your arms and support it on your back in comfort.

**81.6CC** Displacement

**3.6KW** Max Power

**118M/S** Air Speed

**PROFESSIONAL WATER PUMP**
**NTWP30**

Clean water pump with a high work flow and capacity to raise the water up to 30m. Recommended for water displacement work or for irrigation by flood. Pump with cast iron impeller and long-life aluminum housing.

**212CC** Displacement

**5.0KW** Rated Power

**GASOLINE**

**NTLB850C**


Type	Backpack
Discharging Capacity	81.6cc
Max Power	3.6kW
Air Speed	118m/s
Air Volume	2016m <sup>3</sup> /h
Oil-tank Capacity	2200ml
G.W./N.W.	13.6kg/11kg

**CE** **EURO V** **EMC**

**NTWP30**

Inlet Size/Outlet Size	3"/3"
Max.flow	54m <sup>3</sup> /h
Lift Height	30m
Suction Lift	6m
Engine Type	170F
Motoe Type	4 Stroke
Max.Output	7.0hp
Displacement	212cc
Fuel Tank Capacity	3.6L
Oil Capacity	0.6L
N.W./G.W.	28kg/30kg

**CE**
**NTWP20**

Inlet Size/Outlet Size	2"/2"
Max.flow	30m <sup>3</sup> /h
Lift Height	30m
Suction Lift	6m
Engine Type	170F
Motoe Type	4 Stroke
Max.Output	6.5hp
Displacement	196cc
Fuel Tank Capacity	3.6L
Oil Capacity	0.6L
N.W./G.W.	25kg/27kg





GASOLINE &amp; DIESEL WATER PUMP

**PROFESSIONAL WATER PUMP**
**NTWP30CI**


The cast iron high pressure water pump driven by air-cooled gasoline engine. The pump gives you very high lift, which is often used for irrigation and washing. We choose durable, good performance material for producing the pump head.

**420CC** Displacement

**11KW** Rated Power

**GASOLINE**

**NTWP30CI**

Inlet Size/Outlet Size	3"/3"	2"/2"
Max. flow	40m <sup>3</sup> /h	30m <sup>3</sup> /h
Lift Height	92m	80m
Suction Lift	6m	6m
Engine Type	190F	170F
Motoe Type	4 Stroke	4 Stroke
Max. Output	15hp	7.0hp
Displacement	420cc	212cc
Fuel Tank Capacity	6.5L	3.6L
Oil Capacity	1.1L	0.6L
N.W./G.W.	50kg/52kg	24kg/26kg


**NTWP20CI**

 Cast Iron  
Water Pump

**PROFESSIONAL WATER PUMP**
**NTWP10**


NTWP10 is typically applicable for fire fighting, high-altitude water supply, industrial, mining, water supply and drainage of enterprises and high-rise buildings, etc.

**98CC** Displacement

**1.8KW** Rated Power

**GASOLINE**

**NTWP10**

Inlet Size/Outlet Size	1"/1"
Max. flow	6m <sup>3</sup> /h
Lift Height	12m
Suction Lift	6m
Engine Type	152F
Motoe Type	4 Stroke
Max. Output	2.5hp
Displacement	98cc
Fuel Tank Capacity	1.45L
Oil Capacity	0.45L
N.W./G.W.	12kg/13kg





## PROFESSIONAL GENERATOR

## NTGR8500



460CC Displacement

7.8KW Rated Power

GASOLINE



	NTGR8500	NTGR7500	NTGR6500
Voltage	110V/220V/380V	110V/220V/380V	110V/220V/380V
Frequency	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ
AC Rated Output	7.8kW	6.5kW	5.5kW
AC Max Output	8.1kW	7.0kW	6.0kW
Engine Model	192F	190F	190F
Engine Type	4 stroke	4 stroke	4 stroke
Max. Output	16hp	15hp	13hp
Displacement	460cc	420cc	389cc
Fuel Tank Capacity	25L	25L	25L
Oil Capacity	1.1L	1.1L	1.1L
N. W. /G. W.	85/87kgs	79/87kgs	72/74kgs

CE





## GENERATORS

**NEWTOP**

### PROFESSIONAL GENERATOR

#### NTGR3500

This NEWTOP generator has an economic and compact design that offers an abundance of power. It is ideal for use in recreational, small commercial, and offers emergency power for your home.

**212CC** Displacement**3.0KW** Rated Power**GASOLINE****COPPER  
100%**

### PROFESSIONAL GENERATOR

#### NTGR1500

At 1200 starting watts and 1000 running watts, this rugged generator with its durable steel frame is easy to transport and provides just what you need for camping, tailgating, boating, hunting, weekend trips, family vacations and small jobs around the house.

**98CC** Displacement**1.0KW** Rated Power**GASOLINE****COPPER  
100%****NTGR3500****NTGR3000****NTGR2500**

Voltage	110V/220V	110V/220V	110V/220V
Frequency	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ
AC Rated Output	3.0kW	2.8kW	2.2kW
AC Max Output	3.2kW	3.0kW	2.5kW
Engine Model	170F	170F	170F
Engine Type	4 stroke	4 stroke	4 stroke
Max. Output	7.0hp	7.0hp	7.0hp
Displacement	212cc	212cc	212cc
Fuel Tank Capacity	14L	14L	14L
Oil Capacity	0.6L	0.6L	0.6L
N. W. /G. W.	42/44kgs	42/44kgs	40/42kgs


CE

**NTGR1500**

Voltage	110V/220V
Frequency	50HZ/60HZ
AC Rated Output	1.0kW
AC Max Output	1.2kW
Engine Model	156F
Engine Type	4 stroke
Max. Output	3.0hp
Displacement	98cc
Fuel Tank Capacity	5.0L
Oil Capacity	0.35L
N. W. /G. W.	24/25kgs

CE



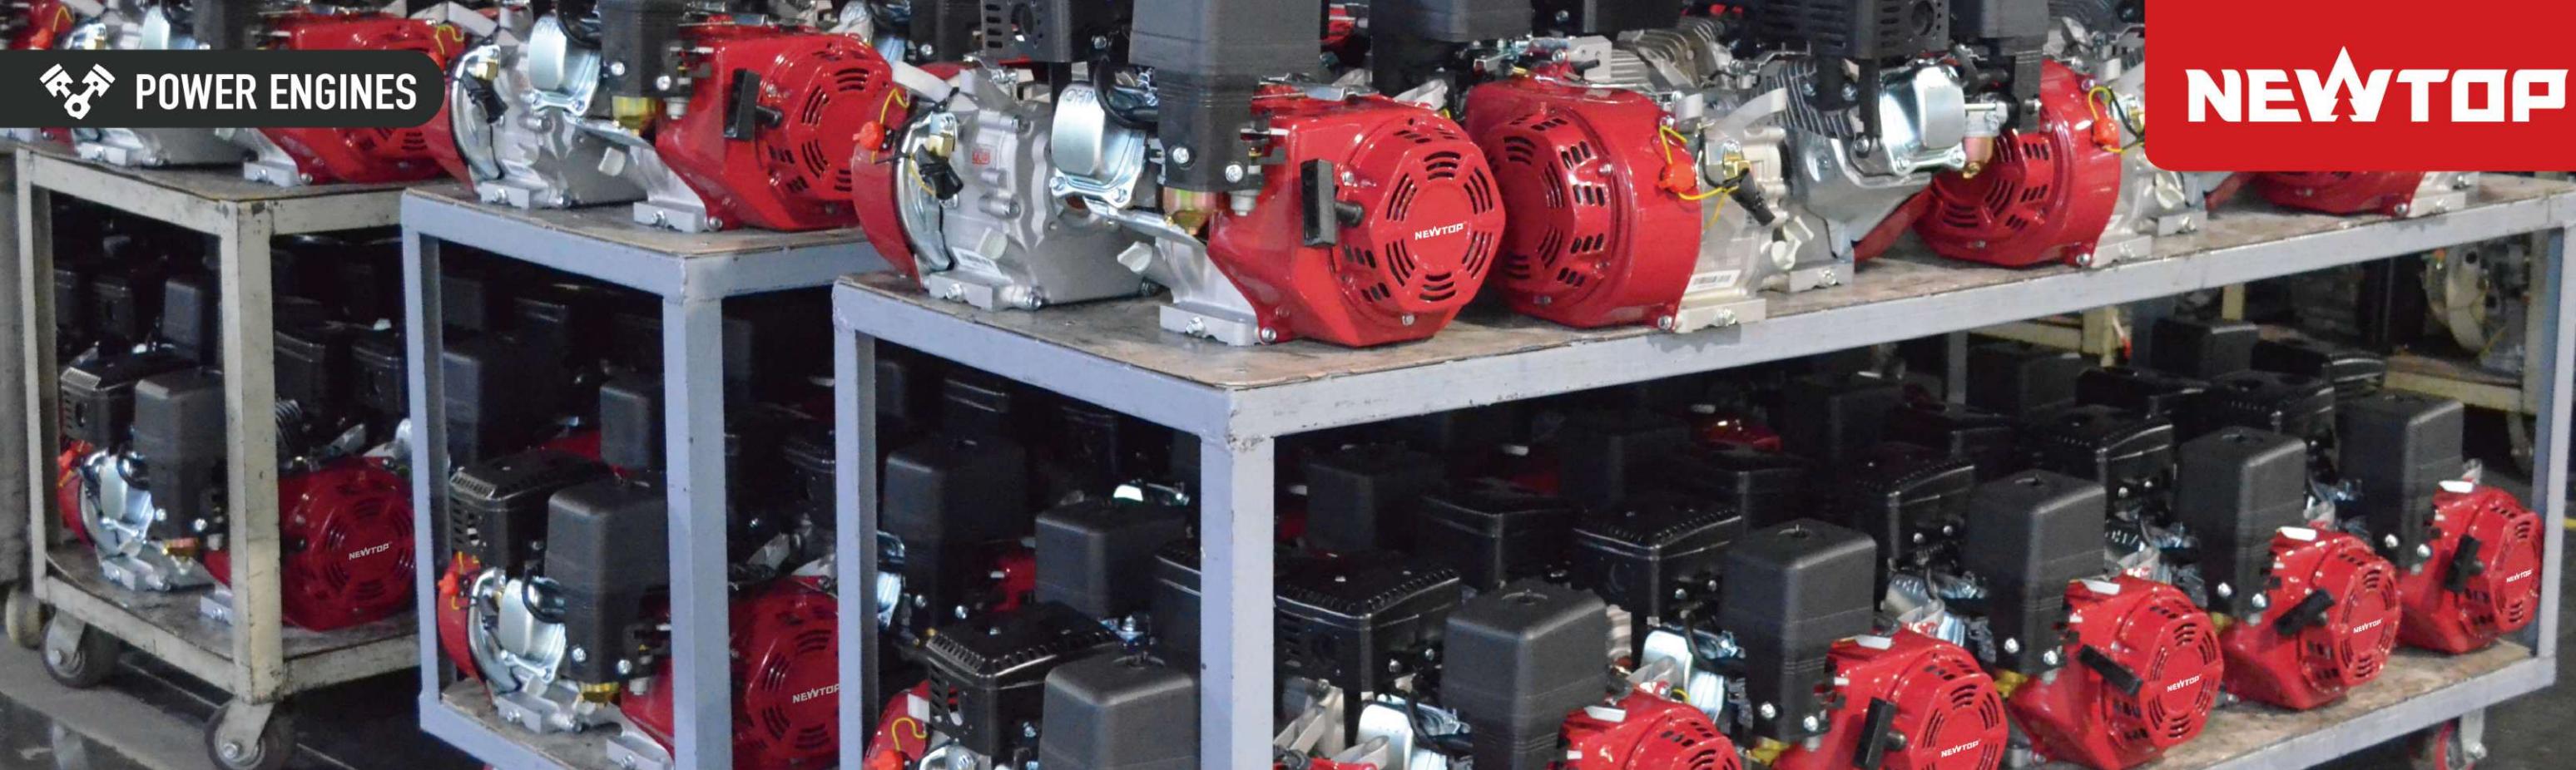

## PROFESSIONAL POWER ENGINES

**NTE152**


This engine is light and less fuel consumption, high efficiency also with a stable horse power output. The start system of engine is recoil or key start, it is easy to operate and start.

**98CC** Displacement

**1.8KW** Rated Power

**GASOLINE**

**NTE152**

Engine Model	152F
Engine Type	4 stroke
Bore X Stroke	52X46mm
Compression Ratio	6.8:1
Max. Output	1.8kW/2.5hp
Max.Torque	3.0N.m
Displacement	98cc
Fuel Consumption	≤450g/kw.h
Fuel Tank Capacity	1.45L
Oil Capacity	0.45L
N. W. /G. W.	9.5/10kgs

CE


[www.newtoptools.com](http://www.newtoptools.com)

## PROFESSIONAL POWER ENGINES

**NTE156**


The NEWTOP NTE156F is a small four-stroke gas engine offering superior performance and reliability. Lower noise levels, lower vibration, and lower emissions – without sacrificing power output or performance.

**98CC** Displacement

**2.6KW** Rated Power

**GASOLINE**

**NTE156**

Engine Model	156F
Engine Type	4 stroke
Bore X Stroke	56X40mm
Compression Ratio	8.8:1
Max. Output	2.6kW/3.5hp
Max.Torque	4.3N.m
Displacement	98cc
Fuel Consumption	≤420g/kw.h
Fuel Tank Capacity	1.6L
Oil Capacity	0.4L
N. W. /G. W.	11/12kgs

CE


[www.newtoptools.com](http://www.newtoptools.com)

**PROFESSIONAL POWER ENGINES**
**NTE235**


The NEWTOP Engine NTE235 is used in all sorts of applications. From Pressure Washers and Construction/Industrial equipment, to Tillers/Cultivators, Generators and Commercial Lawn & Garden Equipment, Agricultural Equipment, Water Pumps, and even Go Karts, are powered by the NTE235.

**236CC** Displacement

**6.3KW** Rated Power

**GASOLINE**

**PROFESSIONAL POWER ENGINES**
**NTE460**



The NEWTOP NTE Series commercial-grade engine is designed for the most demanding commercial applications. It has set an industry standard for reliability and durability. Overhead Valve design offers cooler, fuel-efficient operation and cast iron cylinder sleeve provides longer service life.

**460CC** Displacement

**13KW** Rated Power

**GASOLINE**


**NTE235**
**NTE225**
**NTE210**
**NTE200**
**NTE160**

**NTE235**
**NTE225**
**NTE210**
**NTE200**
**NTE160**

**NTE235**
**NTE225**
**NTE210**
**NTE200**
**NTE160**

**Engine Model**
**172F**
**170F**
**170F**
**168FB**
**168F**
**Engine Type**
**4 stroke**
**4 stroke**
**4 stroke**
**4 stroke**
**4 stroke**
**Bore X Stroke**
**72X58mm**
**70X58mm**
**70X55mm**
**68X54mm**
**68X45mm**
**Compression Ratio**
**8.5:1**
**8.5:1**
**8.5:1**
**8.5:1**
**8.5:1**
**Max. Output**
**8.5hp**
**8.0hp**
**7.0hp**
**6.5hp**
**5.5hp**
**Max.Torque**
**16N.m**
**15N.m**
**13.5N.m**
**12.5N.m**
**10.5N.m**
**Displacement**
**236cc**
**223cc**
**212cc**
**196cc**
**163cc**
**Fuel Consumption**
**≤395g/kw.h**
**≤395g/kw.h**
**≤395g/kw.h**
**≤395g/kw.h**
**≤395g/kw.h**
**Fuel Tank Capacity**
**3.6L**
**3.6L**
**3.6L**
**3.6L**
**3.6L**
**Oil Capacity**
**0.6L**
**0.6L**
**0.6L**
**0.6L**
**0.6L**
**N. W. /G. W.**
**15/16kgs**
**15/16kgs**
**15/16kgs**
**15/16kgs**
**15/16kgs**
**CE**


**EXTENDED WARRANTY**

**NTE460**
**NTE440**
**NTE420**
**NTE390**
**NTE270**


**NTE460**
**NTE440**
**NTE420**
**NTE390**
**NTE270**

**NTE460**
**NTE440**
**NTE420**
**NTE390**
**NTE270**
**Engine Model**
**192FB**
**192F**
**190F**
**188F**
**177F**
**Engine Type**
**4 stroke**
**4 stroke**
**4 stroke**
**4 stroke**
**4 stroke**
**Bore X Stroke**
**92X69mm**
**92X66mm**
**90X66mm**
**88X64mm**
**77X58mm**
**Compression Ratio**
**8.6:1**
**8.6:1**
**8.5:1**
**8.2:1**
**8.2:1**
**Max. Output**
**18.0hp**
**16.0hp**
**16.0hp**
**13.0hp**
**9.0hp**
**Max.Torque**
**27.5N.m**
**27N.m**
**26N.m**
**24.5N.m**
**17.5N.m**
**Displacement**
**460cc**
**440cc**
**420cc**
**389cc**
**270cc**
**Fuel Consumption**
**≤370g/kw.h**
**≤370g/kw.h**
**≤370g/kw.h**
**≤370g/kw.h**
**≤375g/kw.h**
**Fuel Tank Capacity**
**6.5L**
**6.5L**
**6.5L**
**6.5L**
**6L**
**Oil Capacity**
**1.1L**
**1.1L**
**1.1L**
**1L**
**1L**
**N. W. /G. W.**
**31/32kgs**
**31/32kgs**
**31/32kgs**
**31/32kgs**
**27/28kgs**
**CE**

**EXTENDED WARRANTY**
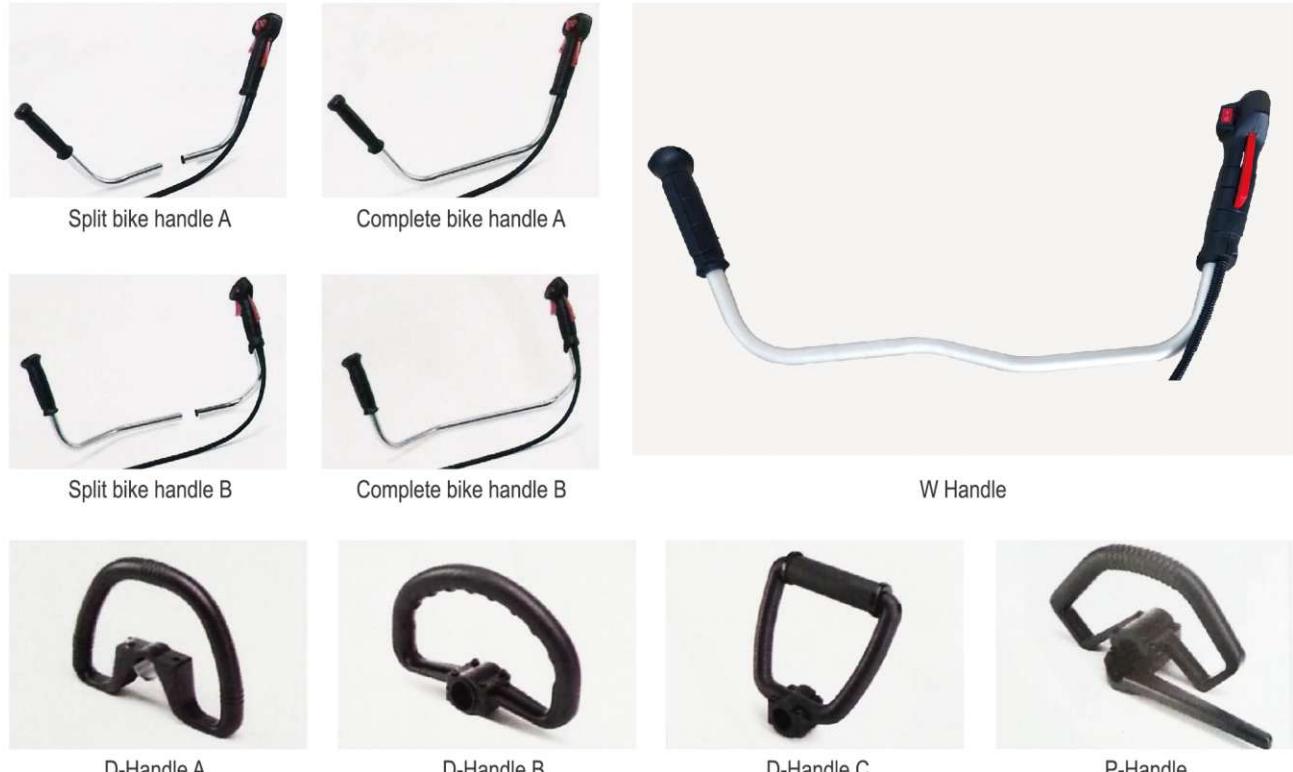
## Brush Cutter Handle Options

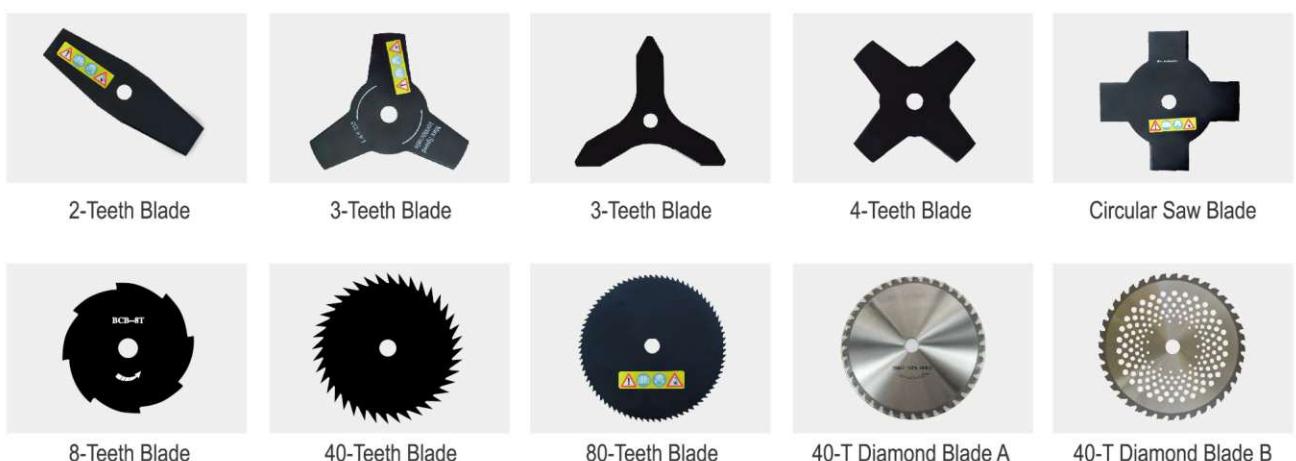

## Blade Options



## Trimmer Head Options





### Shoulder Belt Options

